

S

S SERIES CHECK VALVES

SYMBOL




S series check valves allow free flow in one direction and block flow in the counter direction

Technical data

Size	6	8	10	15	20	25	30	
Threaded connection	Inch	G1/4"	G3/8"	G1/2"	G3/4"	G1"	G1 1/4"	G1 1/2"
	Metric	M14X1.5	M18X1.5	M22X1.5	M27X2	M33X2	M42X2	M48X2
Max .flow rate(L/min)	15	30	40	120	200	300	400	
Max .operating pressure(Mpa)	31.5							
Distance across flats(mm)	19	24	30	36	46	60	63	
Length(mm)	58	58	72	85	98	120	132	
Weight(KGS)	0.1	0.2	0.3	0.5	1	2.1	2.5	
Valve body (Material) Surface treatment	Steel Body Surface Black Oxide							
Oil cleanliness	NAS1638 class 9 and ISO4406 class 20/18/15							

板式安装尺寸 Subplate dimensions

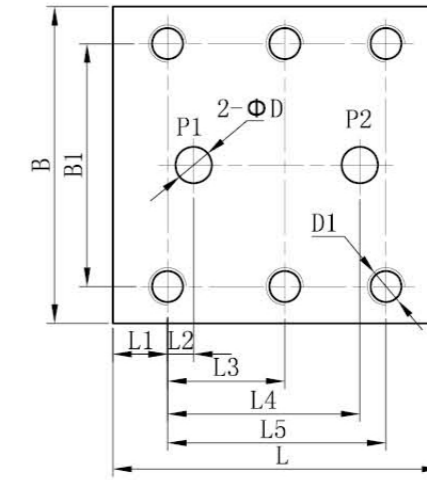

Size	B	B1	L	L1	L2	L3	L4	L5	D	D1
10	87	66.7	90	23.5	7.2	—	35.8	42.9	11	4-M10/20
20	110	79.4	120	23.4	11.1	—	49.2	60.3	22	4-M10/20
30	128	96.8	148	27.8	16.7	42.1	67.5	84.2	28	6-M10/20

