


# WH SERIES HYDRAULIC OPERATED DIRECTIONAL VALVES

WH series hydraulic operated directional valves can be used to change the direction of hydraulic oil by moving the main spool when the valve receives a hydraulic signal from the pilot hydraulic oil.

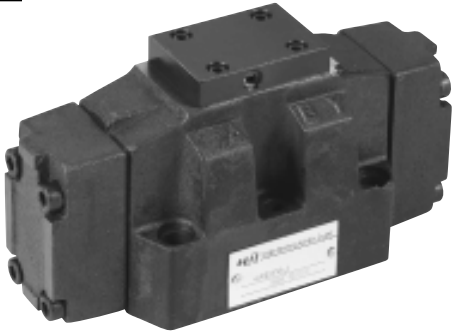

WH 16 H G 20 / S V \*

Model

Size 10; 16 ; 25; 32

No code=Spring return

H=Hydraulic return

(Only size 10: C、 D、 K、 Z、 Y with H)

Function symbol refer to page 19

For further details

No code=NBR seals for petroleum oils  
V=FPM seals for phosphate ester

No code=without pilot adjustment  
S=With meter-in pilot adjustment  
S2=With meter-out pilot adjustment

Series number 20= Size 10; 50=Size 16, 25, 32

Installation dimensions refer to 4WEH models.