





WH29 DIRECTIONAL VALVES

MODEL: K 2 3 J - B W

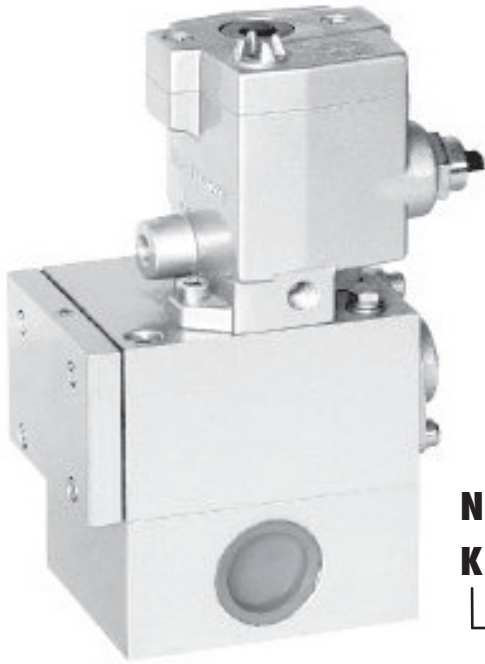


GRAPHICAL SYMBOL

NORMALLY OPEN



NORMALLY CLOSED


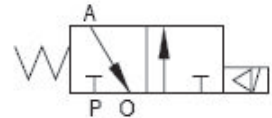


FEATURES

WH29 series is plate fitting shut-off directional valve 3/2 way. It streamlined structure, reliable action easy of maintenance, and especially suited to tough work conditions. Two types: electrically controlled and pneumatic controlled.

NOTE FOR TYPE:

K 2 3 J D - 1 5 T B W

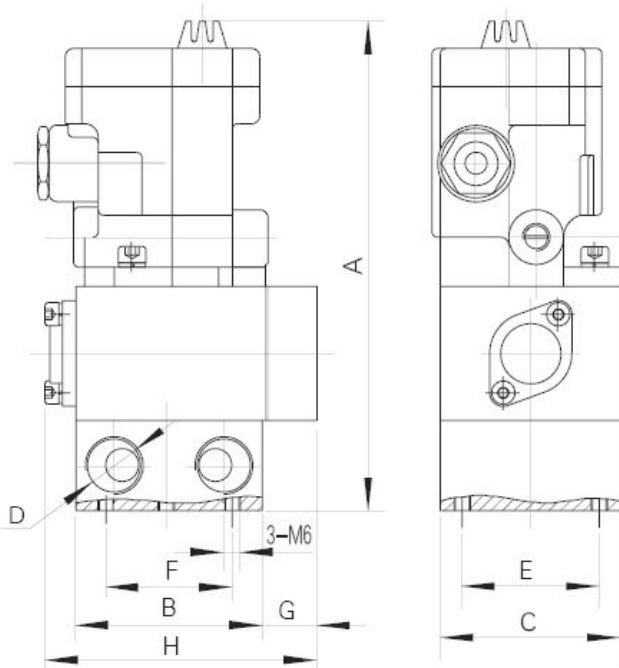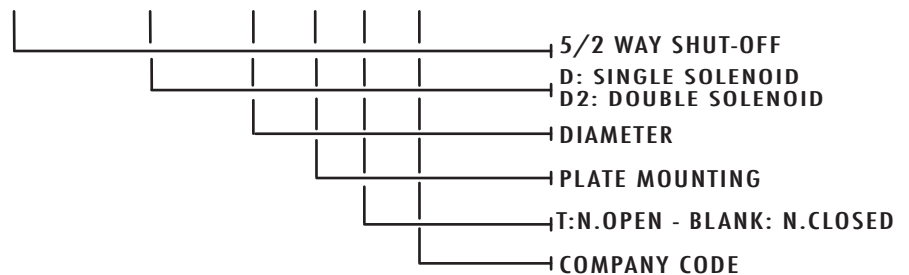

SPECIFICATION

SPECIFICATIONS	FLOW (mm ²)	DIRECTION DIVER- TING TIME (S)	LEAKAGE RATE (ml/min)	WORKING PRESSURE (MPa)
TYPE				
K23JD-8BW	20	≤0.04	≤50	0.2.....0.8
K23JD-10BW	40	≤0.06	≤100	
K23JD-15BW	60			
K23JD-20BW	110	≤0.10	≤200	
K23JD-25BW	190			
K23JD-32BW	300	≤0.15	≤300	
K23JD-40BW	400			


OUTLOOK & DIMENSION

TYPE	DIAMETER	PORT SIZE (D)	A	B	C	E	F	G	L
K23JD-8BW	Ø8	G ¹ / ₄	179	66	90	50	46	20	99
K23JD-10BW	Ø10	G ³ / ₈							
K23JD-15BW	Ø15	G ¹ / ₂							
K23JD-20BW	Ø20	G ³ / ₄	203	78	117	70	60	22	127
K23JD-25BW	Ø25	G1							
K23JD-32BW	Ø32	G ¹ / ₄	218	78	117	70	60	22	127
K23JD-40BW	Ø40	G ¹ / ₂							

SOLENOID VALVES


WH29 DIRECTIONAL VALVES

MODEL: K 2 5 J - B W

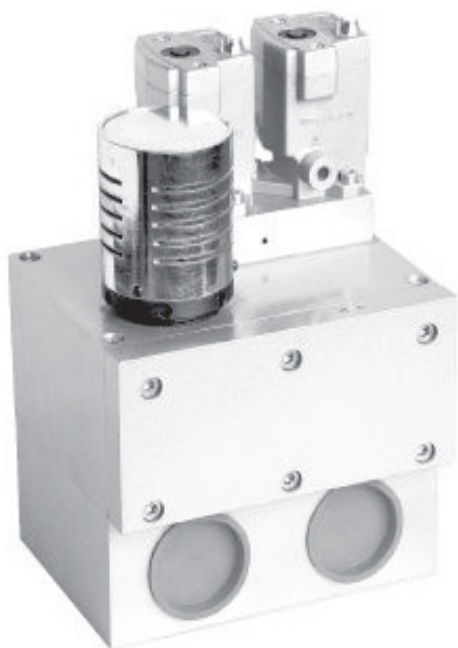


GRAPHICAL SYMBOL

SINGLE SOLENOID

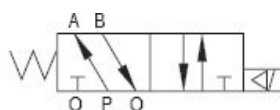

DOUBLE SOLENOID

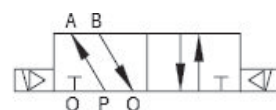


FEATURES

WH29 series is plate fitting shut-off directional valve 5/2 way. It streamlined structure, reliable action easy of maintenance, and especially suited to tough work conditions. Two types: electrically controlled and pneumatic controlled.

NOTE FOR TYPE:

K 2 5 J D - 1 5 B W

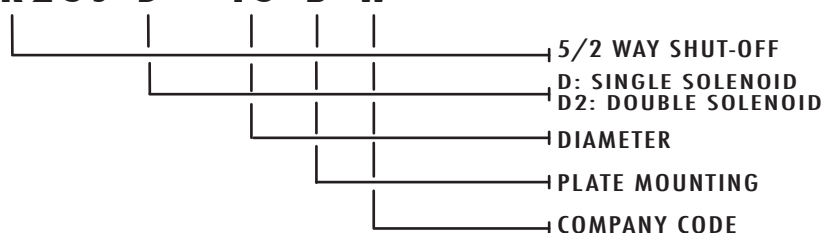


SPECIFICATION

SPECIFICATIONS		FLOW (mm ²)	DIRECTION DIVERTING TIME (S)	LEAKAGE RATE (ml/min)	WORKING PRESSURE (MPa)
TYPE					
K25JD-8BW	K25JD2-8BW	20	≤0.04	≤50	0.2....0.8
K25JD-10BW	K25JD2-10BW	40	≤0.06	≤100	
K25JD-15BW	K25JD2-15BW	60			
K25JD-20BW	K25JD2-20BW	110	≤0.10	≤200	
K25JD-25BW	K25JD2-25BW	190			
K25JD-32BW	K25JD2-32BW	300	≤0.15	≤300	
K25JD-40BW	K25JD2-40BW	400			
K25JD-50BW	K25JD2-50BW	650	≤0.20		



OUTLOOK & DIMENSION

K25JD-BW

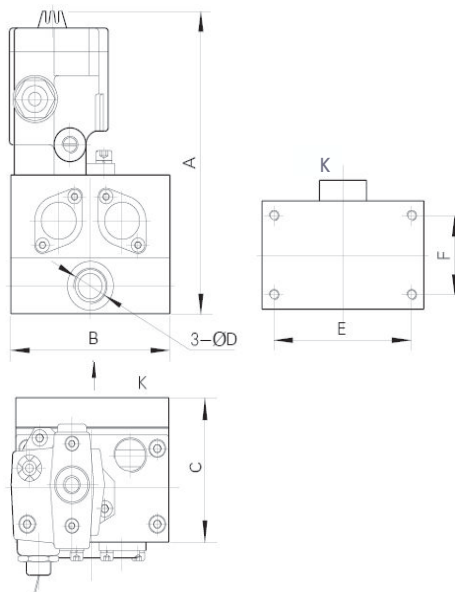

TYPE	DIAMETER	PORT SIZE (D)	A	B	C	E	F
K25JD-8BW	Ø8	G ¹ / ₄	179	100	90	85	46
K25JD-10BW	Ø10	G ³ / ₈					
K25JD-15BW	Ø15	G ¹ / ₂					
K25JD-20BW	Ø20	G ³ / ₄	203	140	117	122	70
K25JD-25BW	Ø25	G1					
K25JD-32BW	Ø32	G1 ¹ / ₄	218	140	117	122	70
K25JD-40BW	Ø40	G1 ¹ / ₂					
K25JD-50BW	Ø50	G2	273	220	170	198	128

K25JD2-BW

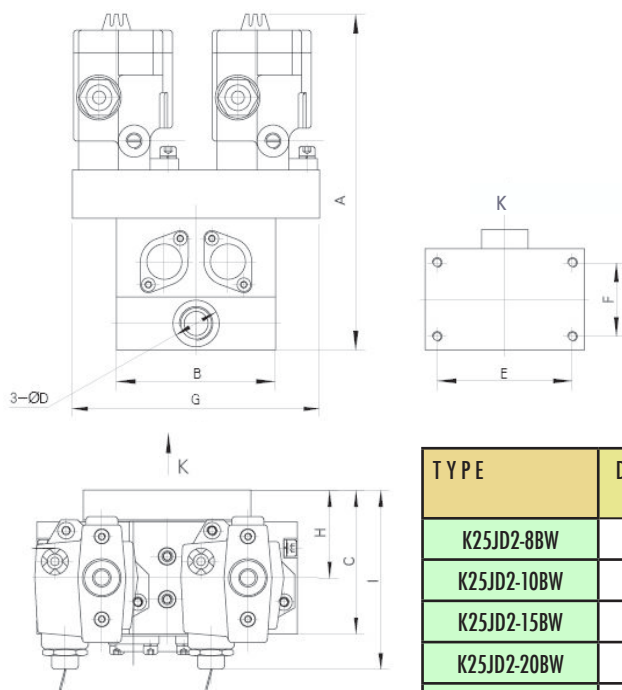

TYPE	DIAMETER	PORT SIZE (D)	A	B	C	E	F	G	H	I
K25JD2-8BW	Ø8	G ¹ / ₄	179	100	90	85	46	155	56	103
K25JD2-10BW	Ø10	G ³ / ₈								
K25JD2-15BW	Ø15	G ¹ / ₂								
K25JD2-20BW	Ø20	G ³ / ₄	203	140	117	122	70	155	67	124
K25JD2-25BW	Ø25	G1								
K25JD2-32BW	Ø32	G1 ¹ / ₄	218	140	117	122	70	155	67	124
K25JD2-40BW	Ø40	G1 ¹ / ₂								
K25JD2-50BW	Ø50	G2	300	220	170	198	128	220	126	202